


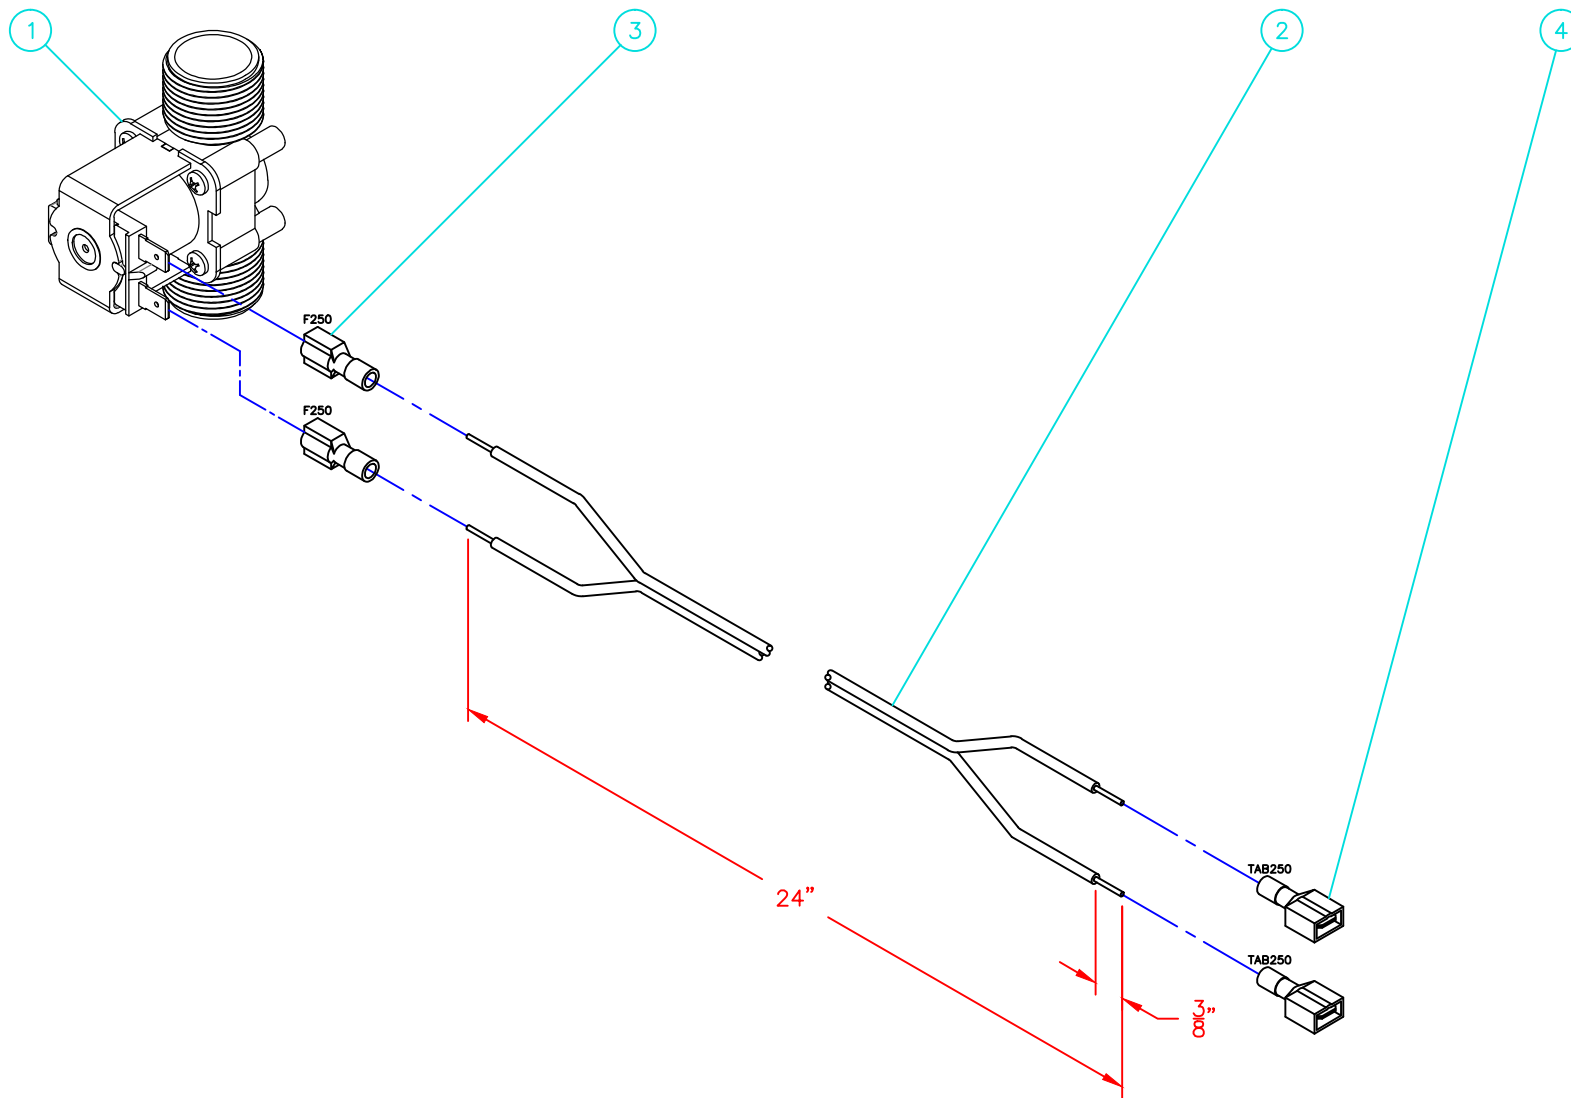

				ALL DIMENSIONS IN INCHES (mm)			Solenoid Valve Ass'y, BWF-2, 24VAC 		
				TOLERANCES					
				DECIMALS	RMS	FRACTIONS			
4	066012	TAB, 250, #18-22 AWG, RED	2	.X ±0.05	500	XX-X/X ±1/16			
3	066002	RECAPTACLE, F250, #18-22 AWG, Red	2	.XX ±0.02	250	X-X/X ±1/32			
2	064021	CABLE, 18-2, VW-1, BLK (985FT per roll)	24"	.XXX ±0.005	125	X/X ±1/64			
1	060207	SOLENOID VALVE, 4 MOUNT HOLE, 24VAC, 3/4"BSPT, BS	1	T.I.R. ±0.010	THD ±1 TURN	∠ ±1°			
No.	Part Number	Description	Qty.						
MATERIAL:		AMADA#:	NEXT ASSY #:						
			(FINISHED GOODS #):						
OPERATION:		SCALE:	BY:	CHK:	DATE:	PART NO.	DWG. NO.	REV	
SPLIT, STRIP AND CRIMP		NTS	Katrin		21.01.21	900184	900184C		